


Electronic Calipers

- 150 mm / 6 in
- 200 mm / 8 in
- 300 mm / 12 in

TWIN-CAL IP40

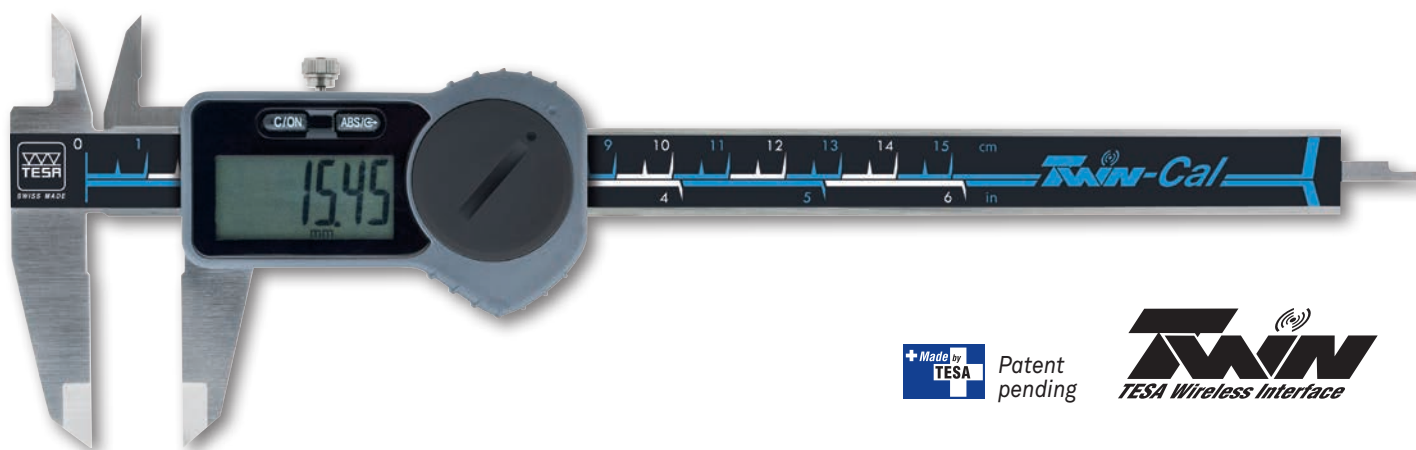

Patent
pending

TWIN
TESA Wireless Interface



UNIQUE FEATURES:

- BIGGEST LCD SCREEN EVER WITH 11 MM DIGITS
- MORE THAN 12 000 HOURS AUTONOMY
- ABS MEASURING MODE
- UNIQUE TWIN & LINK CONNECTIVITY CONCEPT, PLUS EVOLUTIVE OUTPUT CAPABILITY WITH ALL TWIN-CAL
- ROUND OR RECTANGULAR DEPTH ROD
- ACCORDING TO ISO 13 385-1 STANDARD



SWISS
MADE



LINK



ABS



TWIN




IP40



LCD


TWIN & LINK CONNECTIVITY CONCEPT

All the new TWIN-CAL calipers are manufactured with a built-in output connectivity feature! Just connect the "plug and play" TLC (TESA LINK Connector) to the TWIN-CAL, the other end to a computer and retrieve all the data for optimal SPC monitoring. In case SPC is not needed yet, the evolutive TWIN-CAL IP67 offers the possibility to put it in place later! Data format output: RS232/4800 Baud/even/1/2/7 bits.

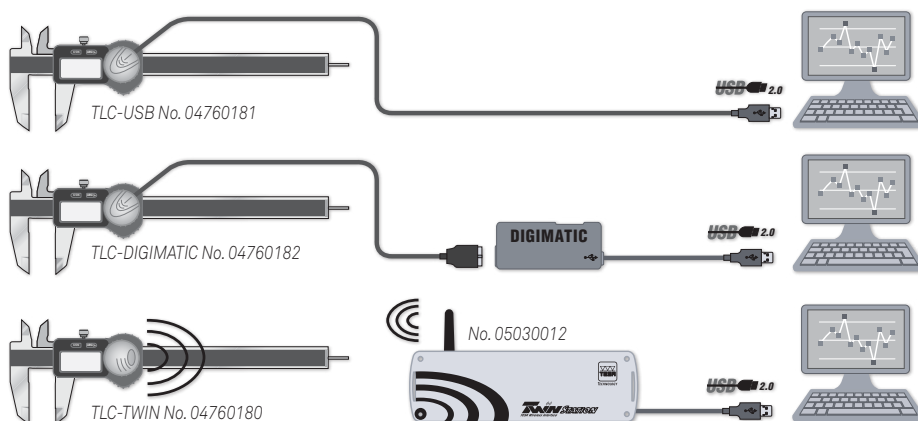


TECHNICAL SPECIFICATIONS

Order number	Measuring range	Depth Rod	Thumb wheel
00530094	150 mm / 6 in	●	●
00530097	150 mm / 6 in	■	—
00530095	200 mm / 8 in	■	●
00530096	300 mm / 12 in	■	●
Accessories			
01961000	Lithium battery 3V, type CR 2032		
00560013	Depth measuring foot (150 mm / 6 in)		
058205	Battery cover for IP40 model		
04981001	DATA-Direct		
04981002	STAT-Express		
S47120003	USB multiplexer, 7x ports USB 2.0		

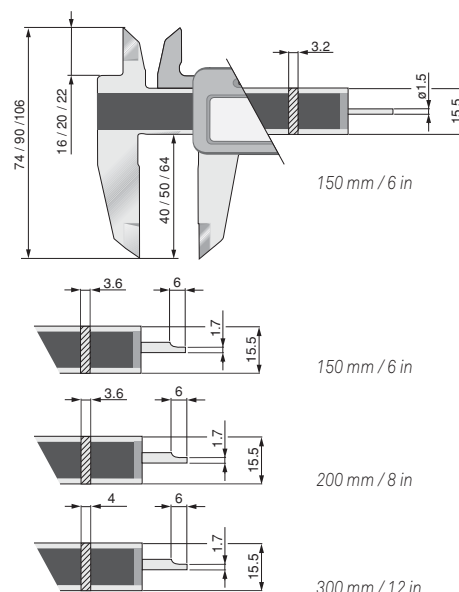

TECHNICAL DATA

Measuring span: 150 mm / 6 in – 200 mm / 8 in – 300 mm / 12 in	Degree of protection: IP40 (CEI/IEC 60529)
Resolution: 0,01 mm / .0005 in	Maximal moving speed: 2,5 m/s
Repeatability: 0,01 mm	Display: large LCD format, 11 mm digits size
Max. permissible error : 0,02 mm per 100 mm, 0,03 mm above. In case of inversion or the use of depth rod, these values are increased by 0,02 mm	Power supply: CR2032 3V
Temperature limit for use and service: 10°C to 40°C	Autonomy: 12 000 hours
Temperature limit for storage: -10°C to 60°C	Material: Stainless steel, 11*10 ⁻⁶ (1/°C)
Maximum relative humidity: 80% for IP40 models (without water)	Weight (150/200/300 mm): 150 g, 200 g, 280 g
	Norm: ISO 13385-1
	Directives: REACH, according to 1907/2006/CE EMC, according to 2004/108/CE DEEE, according to 2002/96/CE

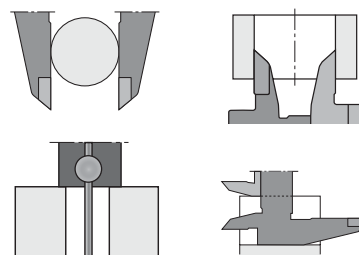

WWW.TESABS.CH

TESA SA Switzerland
Bugnon 38
CH-1020 Renens
Vente Suisse
Tél. +41 (0)21 633 16 00
Fax +41 (0)21 633 17 57
tesa-ventech@hexagonmetrology.com

TESA FRANCE SAS
2, rue Antoine Lavoisier
Pôle Lavoisier – bâtiment A
F-54300 MONCEL-lès-LUNEVILLE
Tél. +33 (0)3 83 76 83 76
Fax +33 (0)3 83 74 13 16
tesa-france@hexagonmetrology.com

**TESA Technology
Deutschland GmbH**
Netzstraße 32
D-71638 Ludwigsburg
Tél. +49 (0)7141 8747 0
Fax +49 (0)7141 8747 88
tesa-de@hexagonmetrology.com

TESA Technology UK Ltd.
Metrology House
Halesfield 13
GB-Telford, Shrops. TF7 4PL
Tél. +44 1952 681 349
Fax +44 1952 681 391
tesa-uk@hexagonmetrology.com

TESA Technology ITALIA s.r.l.
Via Bizzozzero, 118
IT-20032 Cormano (MI)
Tél. +39 02 663 053 69
Fax +39 02 663 090 82
tesa-italia@hexagonmetrology.com

TESA Technology Ibérica
Av. de Vizcaya s/n
Apart. 202
ES-48260 Ermua
Tél. +34 943 170 340
Fax +34 943 172 092
tesa-iberica@hexagonmetrology.com

TESA Benelux
Van Elderenlaan 1
NL-5581 WJ Waalre
Tél. +31 (0)40 222 06 08
Fax +31 (0)40 222 17 16
tesa-benelux@hexagonmetrology.com

TESA SA – Bugnon 38 – CH-1020 Renens – Switzerland – Tel. +41(0)21 633 16 00 – Fax +41(0)21 635 75 35 – www.tesabs.ch – tesa-info@hexagonmetrology.com